

# 4Earth



# 4Earth

---

4Earth acts as a tribute to the everyday natural wonders that surround us. Each color pays homage to the environment that inspires it, and the glossy surface offers a dynamic finish that evokes natural movement as you exist around it. Experience the harmony of nature with 4Earth, and invite the outside in.

---

## Contents

|                          |        |
|--------------------------|--------|
| Colors / Sizes / Mosaics | pg. 2  |
| Visualizations           | pg. 4  |
| Specifications           | pg. 14 |
| Accreditations           | pg. 16 |




## COLORS / SIZES



**GLACIER** 3"x12" - 1104966



**MOON** 3"x12" - 1104971

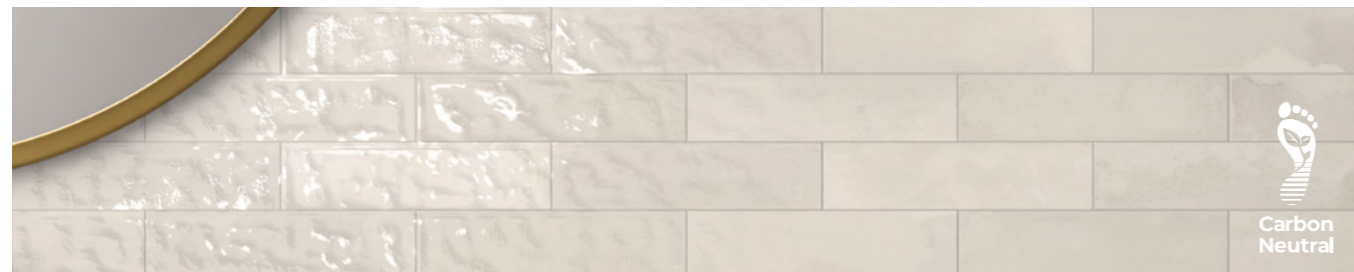

**WARM** 3"x12" - 1106426




**BISCUIT** 3"x12" - 1106425



**DESERT** 3"x12" - 1104970



**SKY** 3"x12" - 1104967

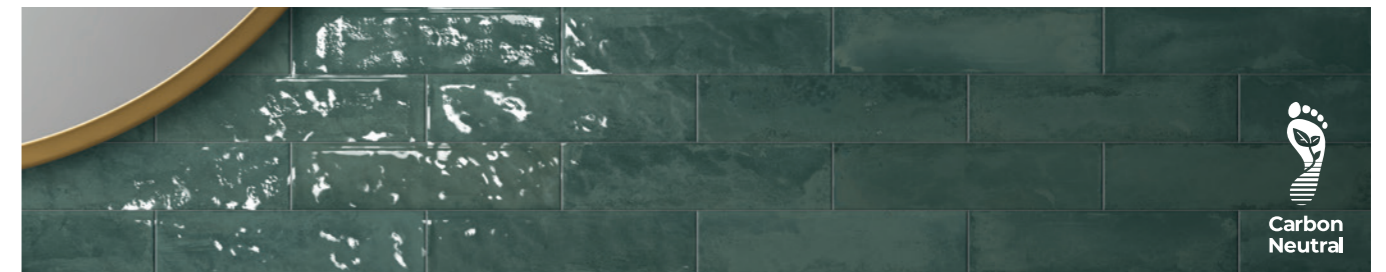


**FOREST** 3"x12" - 1104969



**OCEAN** 3"x12" - 1104968

Colors shown may vary from actual product.  
Final selection should be made from actual product samples.



Porcelain tile  
has the lowest  
embodied carbon  
of any competing  
flooring product.





Wall: 4Earth Moon 3"x12" Glossy  
Floor: Native Birch 8"x48" Matte



Wall: 4Earth Warm 3"x12" Glossy



Wall: 4Earth Desert 3"x12" Glossy  
Floor: EcoStone Cross-Cut Fog 24"x48" Matte



Wall: 4Earth Desert 3"x12" Glossy  
Floor: EcoStone Cross-Cut Fog 24"x48" Matte



100% of the raw materials used in the production of MILE<sup>®</sup>stone tiles are regionally sourced, supporting local industries and reducing transportation related carbon emissions.



Wall: 4Earth Sky 3"x12" Glossy  
Floor: Native Chestnut 8"x48" Matte




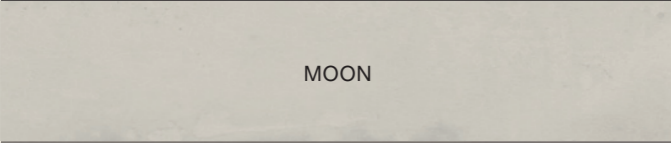



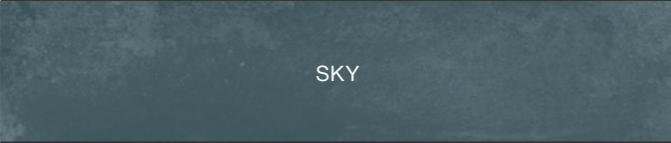


4Earth Forest 3"x12" Glossy

As a part of our pledge to become carbon neutral,  
4Earth serves as a vital step in the process of  
creating a more sustainable world.

It's time to take responsibility.



## Colors + Sizes

| Colors   | 3"x12"  | 3"x12"<br>Bullnose |
|--|---------|--------------------|
|  GLACIER  | 1104966 | 1105207            |
|  MOON     | 1104971 | 1105212            |
|  WARM     | 1106426 | 1106428            |
|  BISCUIT  | 1106425 | 1106427            |
|  DESERT  | 1104970 | 1105211            |
|  SKY    | 1104967 | 1105208            |
|  FOREST | 1104969 | 1105210            |
|  OCEAN  | 1104968 | 1105209            |

Colors shown may vary from actual product.  
Final selection should be made from actual product samples.
















## Cleaning & Maintenance / Routine Care Instructions



Scan the QR code with your smartphone.
















## Technical Specifications

This product meets or exceeds all standards described in ANSI A137.1.  
Este producto cumple o excede todos los estandares de ANSI A137.1.

|   | SPECS                                  | TEST METHOD | INDUSTRY STANDARD  | MILE <sup>®</sup> stone VALUES |            |
|---|--|-------------|--|--------------------------------|------------|
|    | WATER ABSORPTION                       | ASTM C373   | ≤0.5%  | ≤0.5%                          |            |
|    | SURFACE WEAR RESISTANCE                | ANSI A137.1 | Surface Wear-resistance properties of glazed vitreous and porcelain tiles.   | ALL RESIDENTIAL / COMMERCIAL   |            |
|    | CHEMICAL RESISTANCE                    | ASTM C650   | A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. Sample must show no visible defects.   | NOT AFFECTED                   |            |
|    | D.C.O.F. AcuTest <sup>®</sup>          | ANSI A326.3 | INDOOR ≥0.42 WET   | ≥0.42 WET (MATTE SURFACES)     |            |
|   |  |             | OUTDOOR >0.55 WET  | >0.55 WET (2CM & GRIP)         |            |
|    | STAIN RESISTANCE                       | ASTM C1378  | Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning. | NOT AFFECTED                   |            |
|    | BREAKING STRENGTH GAUGED PORCELAIN 6MM | ASTM C1505  | ≥175 lbf   | ≥200 lbf                       |            |
|   | BREAKING STRENGTH                      | ASTM C648   | ≥275 lbf   | ≥300 lbf                       |            |
|   | BREAKING STRENGTH OUTDOOR 2CM          | ASTM 1505   | 2000 lbf (10.9 kN)   | ≥2500 lbf                      |            |
|  | RESISTANCE TO FREEZE                   | ASTM C1026  | A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.                 | RESISTANT                      |            |
|  | WARPAGE EDGE                           | ASTM C485   | ±0.40% or ±0.05 in (±1.8 mm)   | Compliant                      | Rectified  |
|  | WARPAGE DIAGONAL                       | ASTM C485   | ±0.40% or ±0.07 in (±1.8 mm)   | Compliant                      | Rectified  |
|  | WEDGING                                | ASTM C502   | ±0.25% or ±0.03 in (±0.8 mm)   | Compliant                      | Rectified  |
|  | WARPAGE EDGE                           | ASTM C485   | ±0.50% or ±0.07 in (±1.8 mm)   | Compliant                      | Calibrated |
|  | WARPAGE DIAGONAL                       | ASTM C485   | ±0.50% or ±0.07 in (±1.8 mm)   | Compliant                      | Calibrated |
|  | WEDGING                                | ASTM C502   | ±0.50% or ±0.08 in (±2.0 mm)   | Compliant                      | Calibrated |
|  | THICKNESS GAUGED PORCELAIN             | ASTM C499   | Range: ± 0.02 in   | ≤0.02 in                       |            |
|   | THICKNESS                              | ASTM C499   | Range: ± 0.04 in   | ≤0.04 in                       |            |
|  | LENGTH / WIDTH VARIATION               | ASTM C499   | ±0.25% or ±0.03 in (±0.8 mm)   | ±0.25%                         |            |

• Due to the inherent nature of fired porcelain tile, it is important to note that the coefficient of friction may vary within and between product runs.

# Green Certifications

|  |  |  |  |
|--|--|--|--|
|  <p><b>Human Health</b></p>                 |  <p><b>Declare</b></p> <p>✓</p> <p>Declare Red List Free</p>  |  <p>VERSION 2.0</p> <p>✓</p> <p>HPD measured down to 100ppm</p>   |  <p>UL GREENGUARD</p> <p>PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS<br/>UL 2898C1<br/>UL 2898C2<br/>UL 2898</p> <p>GOLD</p> <p>✓</p> <p>Greenguard Gold Certified (Inherently Non-Emitting)</p> |
|  <p><b>Ecosystem Health</b></p>             |  <p>POST - Consumer Recycled Content</p> <p>✓</p> <p>As much as 64% post-consumer recycled content.</p>   |  <p>GREEN SQUARED</p> <p>✓</p> <p>Green Squared Certified</p>  |  <p>PFAS<br/>PVC<br/>VOC</p> <p>✓</p> <p>Contains no PFAS, PVC, or VOCs</p>   |
|  <p><b>Climate Health</b></p>             |  <p>EPD<sup>®</sup><br/>THE INTERNATIONAL EPD<sup>®</sup> SYSTEM</p> <p>✓</p> <p>Third Party verified EPD<br/>GWP 6mm - 16.09 kg/m<sup>2</sup><br/>GWP 8mm - 22.8 kg/m<sup>2</sup><br/>GWP 2CM - 56.25 kg/m<sup>2</sup></p> |  <p>✓</p> <p>100% of the raw material used in the body of our tile is regionally sourced, supporting sustainable practices and local industries.</p> |  |
|  <p><b>Social Health &amp; Equity</b></p> |  <p>Certified Corporation</p> <p>✓</p> <p>Certified B Corp (as of 2025)</p>   |  <p>BENEFIT CORPORATION</p> <p>✓</p> <p>Registered Benefit Corporation in the state of TN (as of 2022)</p>   |  <p>bsi ISO 9001 Quality Management Systems CERTIFIED ISO 14001 Environmental Management CERTIFIED</p> <p>✓</p> <p>ISO 9001 Certified<br/>ISO 14001 Certified</p>                               |

## Progress that invests in the entire society

As an active member of the U.S. Green Building Council, MILE<sup>®</sup>stone spreads awareness to the community and encourages the use of building solutions through environmentally friendly practices. Our products positively contribute to the requirements for obtaining the LEED (Leadership in Energy and Environmental Design) and WELL (IWBI) certifications.

## A commitment to environmental sustainability and responsibility

We are committed to conscious development that minimizes the negative impact of manufacturing production on the environment. Our general approach to sustainability intersects with our business strategy to embrace three areas of responsibility: economic, social, and environmental. Some ways we prove this are:

- Products containing as much as 64% recycled content.
- Zero industrial wastewater discharge.
- A 99% internal process recycling rate.
- 100% regionally sourced raw materials used in the production of the body of our tile, supporting local industries and sustainable practices.

MILE<sup>®</sup>stone is taking these and other steps, as well as actively investing to reduce carbon emissions to ensure that we reach full carbon neutrality.



MADE IN THE USA



300 International Blvd. Clarksville, TN 37040 | [www.milestonetiles.com](http://www.milestonetiles.com) | 1-877-356-7461

