

4Earth



4Earth

4Earth acts as a tribute to the everyday natural wonders that surround us. Each color pays homage to the environment that inspires it, and the glossy surface offers a dynamic finish that evokes natural movement as you exist around it. Experience the harmony of nature with 4Earth, and invite the outside in.

Contents

Colors / Sizes / Mosaics	pg. 2
Visualizations	pg. 4
Specifications	pg. 14
Accreditations	pg. 16



COLORS / SIZES



GLACIER 3"x12" - 1104966




MOON 3"x12" - 1104971



DESERT 3"x12" - 1104970



SKY 3"x12" - 1104967

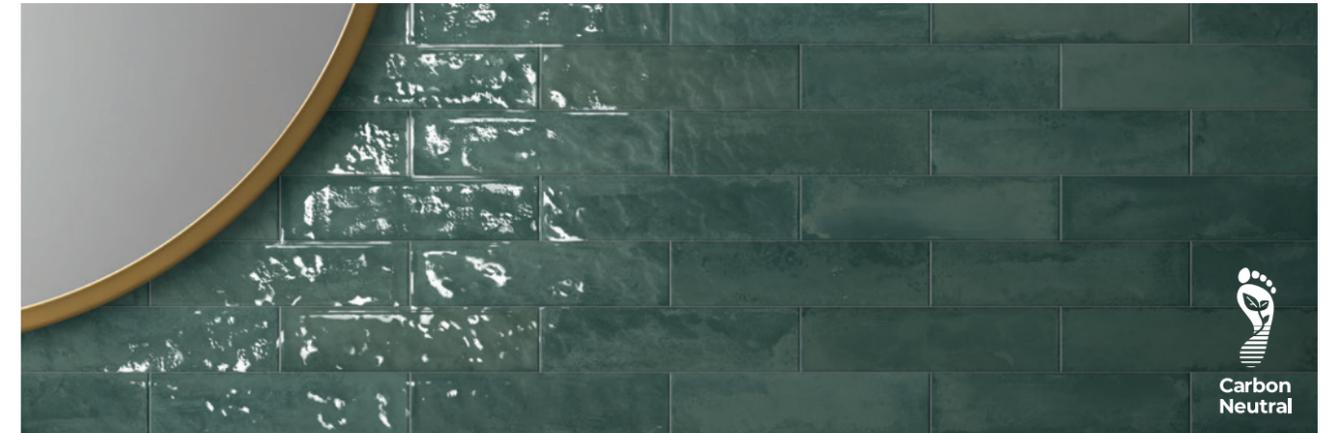

FOREST 3"x12" - 1104969



OCEAN 3"x12" - 1104968

Colors shown may vary from actual product.
Final selection should be made from actual product samples.



Porcelain tile
has the lowest
embodied carbon
of any competing
flooring product.





Wall: 4Earth_Moon_3"x12"_Glossy
Floor: Native_Birch_8"x48"_Matte



Wall: 4Earth_Desert_3"x12"_Glossy
Floor: EcoStone_Cross-Cut_Fog_24"x48"_Matte



Over 95% of the raw materials used in the production of MILE[®]stone tiles are sourced within a 500 mile radius of the factory, located in Clarksville, TN.



Wall: 4Earth_Sky_3"x12"_Glossy
Floor: Native_Chestnut_8"x48"_Matte




As a part of our pledge to become carbon neutral,
4Earth serves as a vital step in the process of
creating a more sustainable world.

It's time to take responsibility.



Colors + Sizes

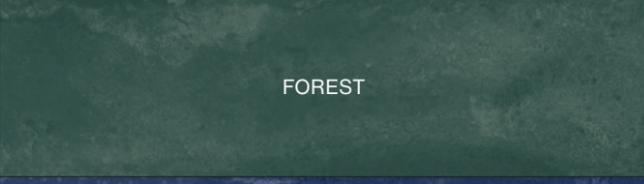Colors	3"x12"	3"x12" Bullnose
 GLACIER	1104966	1105207
 MOON	1104971	1105212
 DESERT	1104970	1105211
 SKY	1104967	1105208
 FOREST	1104969	1105210
 OCEAN	1104968	1105209

Colors shown may vary from actual product.
Final selection should be made from actual product samples.

Cleaning & Maintenance / Routine Care Instructions



Scan the QR code with your smartphone.

Technical Specifications

This product meets or exceeds all standards described in ANSI A137.1.
Este producto cumple o excede todos los estandares de ANSI A137.1.

	SPECS	TEST METHOD	INDUSTRY STANDARD	MILE [®] stone VALUES	
	WATER ABSORPTION	ASTM C373	≤0.5%	≤0.5%	
	SURFACE WEAR RESISTANCE	ANSI A137.1	Surface Wear-resistance properties of glazed vitreous and porcelain tiles.	ALL RESIDENTIAL / COMMERCIAL	
	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. Sample must show no visible defects.	NOT AFFECTED	
	D.C.O.F. AcuTest [®]	ANSI A326.3	INDOOR ≥0.42 WET	≥0.42 WET (MATTE SURFACES)	
			OUTDOOR >0.55 WET	>0.55 WET (2CM & GRIP)	
	STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED	
	BREAKING STRENGTH GAUGED PORCELAIN 6MM	ASTM C1505	≥175 lbf	≥200 lbf	
	BREAKING STRENGTH	ASTM C648	≥275 lbf	≥300 lbf	
	BREAKING STRENGTH OUTDOOR 2CM	ASTM 1505	2000 lbf (10.9 kN)	≥2500 lbf	
	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT	
	WARPAGE EDGE	ASTM C485	±0.40% or ±0.05 in (±1.8 mm)	± 0.40%	Rectified
	WARPAGE DIAGONAL	ASTM C485	±0.40% or ±0.07 in (±1.8 mm)	± 0.40%	Rectified
	WEDGING	ASTM C502	±0.25% or ±0.03 in (±0.8 mm)	± 0.25%	Rectified
	WARPAGE EDGE	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
	WARPAGE DIAGONAL	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
	WEDGING	ASTM C502	±0.50% or ±0.08 in (±2.0 mm)	± 0.50%	Calibrated
	THICKNESS GAUGED PORCELAIN	ASTM C499	Range: ± 0.02 in	≤0.02 in	
	THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in	
	LENGTH / WIDTH VARIATION	ASTM C499	±0.25% or ±0.03 in (±0.8 mm)	±0.25%	

• Due to the inherent nature of fired porcelain tile, it is important to note that the coefficient of friction may vary within and between product runs.

Green Certifications

 <p>Human Health</p>	 <p>Declare.</p> <p>✓</p> <p>Declare Red List Free</p>	 <p>VERSION 2.0</p> <p>✓</p> <p>HPD measured down to 100ppm</p>	 <p>UL GREENGUARD</p> <p>PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS UL 2898G1 UL 2818</p> <p>GOLD</p> <p>✓</p> <p>Greenguard Gold Certified (Inherently Non-Emitting)</p>
 <p>Ecosystem Health</p>	 <p>POST - Consumer Recycled Content</p> <p>✓</p> <p>As much as 64% post-consumer recycled content.</p>	 <p>GREEN SQUARED</p> <p>✓</p> <p>Green Squared Certified</p>	 <p>PFAS PVC VOC</p> <p>✓</p> <p>Contains no PFAS, PVC, or VOCs</p>
 <p>Climate Health</p>	 <p>EPD® THE INTERNATIONAL EPD® SYSTEM</p> <p>✓</p> <p>Third Party verified EPD GWP 6mm - 16.09 kg/m² GWP 8mm - 22.8 kg/m² GWP 2CM - 56.25 kg/m²</p>	 <p>✓</p> <p>100% of the raw material used in the body of our tile is regionally sourced, supporting sustainable practices and local industries.</p>	
 <p>Social Health & Equity</p>	 <p>Certified Corporation</p> <p>✓</p> <p>Certified B Corp (as of 2025)</p>	 <p>BENEFIT CORPORATION</p> <p>✓</p> <p>Registered Benefit Corporation in the state of TN (as of 2022)</p>	 <p>bsi ISO 9001 Quality Management Systems CERTIFIED ISO 14001 Environmental Management CERTIFIED</p> <p>✓</p> <p>ISO 9001 Certified ISO 14001 Certified</p>

Progress that invests in the entire society

As an active member of the U.S. Green Building Council, MILE[®]stone spreads awareness to the community and encourages the use of building solutions through environmentally friendly practices. Our products positively contribute to the requirements for obtaining the LEED (Leadership in Energy and Environmental Design) and WELL (IWBI) certifications.

A commitment to environmental sustainability and responsibility

We are committed to conscious development that minimizes the negative impact of manufacturing production on the environment. Our general approach to sustainability intersects with our business strategy to embrace three areas of responsibility: economic, social, and environmental. Some ways we prove this are:

- Products containing as much as 64% recycled content.
- Zero industrial wastewater discharge.
- A 99% internal process recycling rate.
- 100% regionally sourced raw materials used in the production of the body of our tile, supporting local industries and sustainable practices.

MILE[®]stone is taking these and other steps, as well as actively investing to reduce carbon emissions to ensure that we reach full carbon neutrality.



MADE IN THE USA



300 International Blvd. Clarksville, TN 37040 | www.milestonetiles.com | 1-877-356-7461

